

# AR2015E Web Based RFID and PIN Controller

www.meritlilin.com




## Product Feature


- ▶ Supports standalone mode or web management mode via LILIN Access Control System.
- ▶ Stores 20,000 cardholders.
- ▶ Stores events up to 65,536 during offline.
- ▶ APB (Anti-PassBack): To prevent the cardholders double enter or exit a door with one valid card.
- ▶ Duress code: Input a specific code to open the door and send an alarm to the security center.
- ▶ Supports NFC.
- ▶ IP 65 Waterproof / moisture / dustproof design.
- ▶ Supports PoE power supply with ARR2010E.

## Dimensions

78.5(L) × 129(W) × 23(H) mm

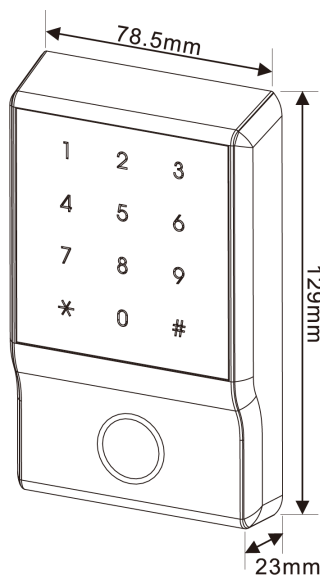

## Diagram of mounting holes:(unit in mm)

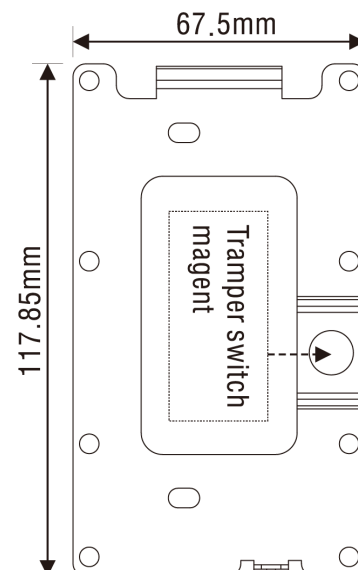

## Web Based RFID and PIN Controller

### General

Model	AR2015E
Supported card	Mifare, NFC
Number of Cardholders	20,000
Offline Events	65,536
Remote control	Yes
Anti-PassBack	Yes
Duress code	Yes

### Communication

Communication Interface	TCP/IP 10/100Mbps
Reader Port	Wiegand (26bit or 34bit)

### Power

Power Input	DC 9 – 24V/1A · PoE (With ARR2010E)
Current Consumption	400mA ± 5%

### Input / Output Device

Input ports	4 Input (WID : Wiegand Input / EXIT : Exit Button / SENSOR : Door Sensor / FIRE : Fire Alarm)
Output ports	1 Output (COM : Door Lock)
LED Indicator	3-color LED Status light (Blue: Standby/Green: Pass/ Red: Not Passed)

### Appearance / Environment

Operating temperature	0°C – 65°C / 32°F – 149°F
Relative Humidity	5% – 80% RH
Dimension	78.5mm(L) × 129mm(W) × 23mm(H)
Weight	122 g
Button format	Touch panel

### Others

Certification	CE: EN 300 330, EN301489-1 / -3, EN62368, EN62479 ; FCC : Part 15 Subpart B & subpart C IP65
Supported Software	LILIN Access Control System
Package Content	WEB BASED RFID AND PIN CONTROLLER (AR2015E) × 1 Hanger ×1 Accessory kit (Plastic screw ×4 · Fastening screw ×4 · 1N4004 Diode ×1) Cable × 4 (2pin ×1 · 5pin ×1 · 6pin ×1 · 8pin with RJ45 ×1) Installation Guide ×1
Optional Accessories	POE RELAY BOX (ARR2010E) Power (PMH-PSU330)

Copyright © Merit LILIN 2018 | All rights reserved | Product specifications and availability are subject to change without notice