

# ER-212XA


## Vari-Focal Bullet IP Camera (Asia & Africa Only)



### Feature

- 2.0mp IPC Bullet
- IR LED: 36pcs SMD LED
- IR Range: 30M
- Lens:2.8-12mm
- With POE ; SD ; AUDIO ; ALARM

### Body

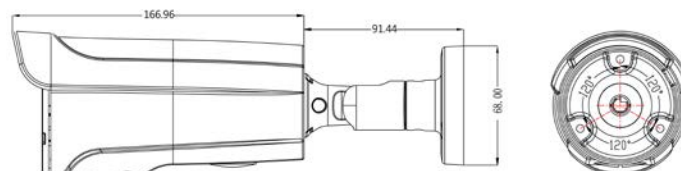

Vari-Focal Bullet IP Camera		
Sensor	1/2.9" SONY	
Lens	2.8-12mm	
IR Range	36pcs IR LED,30m IR Range	
Min lux	Color 0.1Lux@F1.2, white/black 0.01Lux@F1.2	
S/N Ratio	≥50dB(AGC OFF)	
video processing	H264 , Baseline/Main Profile/High Profile Encoding ; MJPEG Encoding. Support 32Kbps-16Mbps continuous adjusting , support CBR/VBR ; Adjustable frame rate from 1-30 fps/s.	
Video output	Main bit stream	1920*1080 , 1-25(30) fps/s ; 1280*720 , 1-25(30) fps/s
	Sub bit stream	720*576 , 1-25(30) fps/s ; 640*480 , 1-25(30) fps/s 640*352 , 1-25(30) fps/s ; 320*240 , 1-25(30) fps/s
Audio interface	Support 1 route audio input;Audio output 1 road phenomenon	
Audio Processing	G.711 Encoding&Decoding Standard,support two-way voice intercom function	
Network Port	1 RJ45 Ethernet port, 10/100M self-adjustable	
Network protocol	Support RTSP/FTP/PPPOE/DHCP/DDNS/NTP/UPnP etc Protocol	
WDR	> 80dB	
TF card storage	Support Micro SD/SDHC/SDXC card for circular recording (card is not included)	
IR linkage	support	
Reset interface	support	
Alarm Input	1 CH input;low electrical effective	
Alarm Output	1 CH IO output	
Operation function	Support WEB configuration, support OSD, support real-time video transmission, Support motion detection and IO alarm linkage for front storage / capture, support storage for front saving, support motion detection and IO alarm center to remind and screen linkage (Note: IO alarm and front storage limited functional type) Support MJPEG capture, support unit client-side remote management software and platform system application, Provide complete SDK development kit	
POE supply	Support	
Standard protocol	Onvif 2.4	
Mobile monitor	Support IOS , Android	
Power supply	DC12V, 3.6W / PoE	
Working Temperature	-10°C ~ 55°C	
Waterproof degree	IP66	

No liability will be accepted for any errors or omissions. Design and specifications are subject to change without notice.