




---

## TCP/IP Multi Door Control Panel

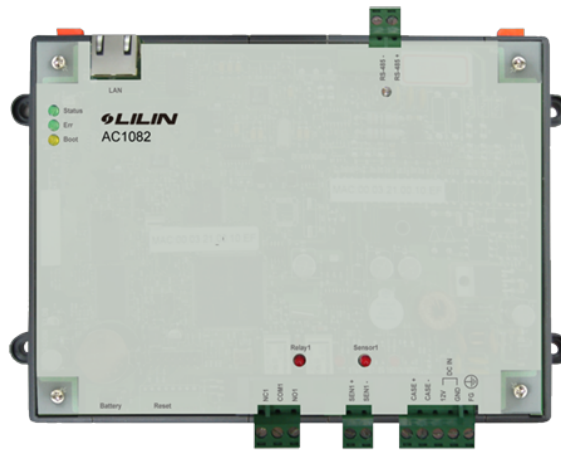

---

## Features

- Web management via LILIN Access Control System.
- 2-way control: Up to 8 doors. (It needs to connect to ACW1012)
- Built-in 2 inputs to connect to fire and door closure detection sensors.
- Built-in 1 relay output to connect to an alarm output device.
- Stores 20,000 cardholders.
- Stores events up to 80,000 during offline.
- APB (Anti-PassBack): To prevent the cardholders double enter or exit a door with one valid card.
- Duress code: Input a specific code to open the door and send an alarm to the security center.
- Built-in RTC (Real Time Clock) function ensures accurate date/time.
- Built-in H/W watchdog to keep controller to be available.
- Easy installation & maintenance design.